


精度等级/General	tolerance/(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50			

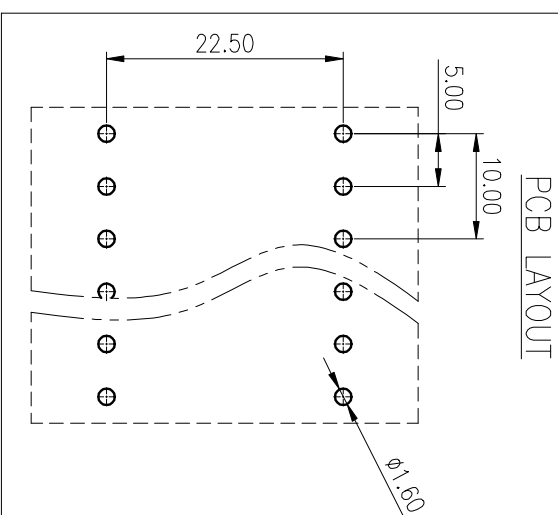

ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing	PA66	UL94V-0
2	Screw	Copper alloy	M4/Ni Plated
3	Current Carrier	Copper alloy	M4/Ni Plated
4	Pressing line plate	Copper	Sn Plated
5	Cage	Copper	Ni Plated

REV	ECN	DESCRIPTION	DRAFT	DATE
1				

ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing	PA66	UL94V-0
2	Screw	Copper alloy	M4/Ni Plated
3	Current Carrier	Copper alloy	M4/Ni Plated
4	Pressing line plate	Copper	Sn Plated
5	Cage	Copper	Ni Plated

UL 标准/UL Standard:	B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)	300	701	300 701 600/5
IEC 标准/IEC Standard:			
额定电压/电压/Rated Voltage(V)/Current(A)	450	57	
工频耐压/Withstanding voltage(V/1Min)	AC2500		
拧紧扭矩/Torque Tightening(N·m/Lb.in)	M4	1.2/10.62	
架空范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/MWG)	0.2~10/24~6		
间距/Pitch(mm)/Lead Spacing/Poles	10/N=01~12P		
引线长度/Stripping length(mm)	13~14		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL: SURFACE:

NINGBO DEGSON ELECTRICAL CO., LTD

PS10-XXP-1Y-00A(H)

DRAWING NO.: 10002152
 TYPE: CUSTOMER DRAWING
 SCALE: 1.5:1 SHEET 1/1