
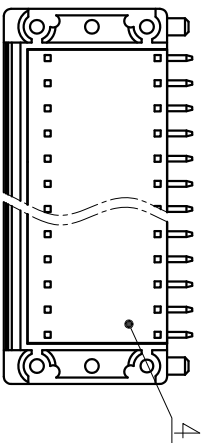
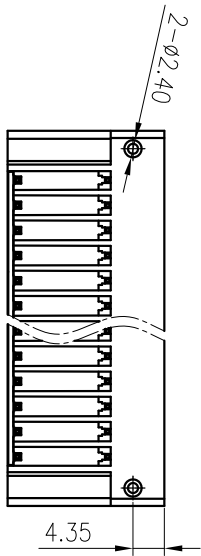

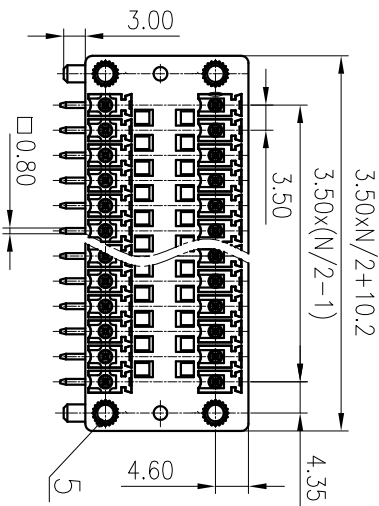


公差等级/General Tolerances(mm)		公差等级/General Tolerances(mm)	
0	>3	>6	>18
~	~	~	~
3	6	10	18
~	~	~	~
~	~	~	~
±0.12	±0.18	±0.22	±0.26
±0.31	±0.37	±0.57	±0.80
±1.05	±1.15	±1.60	±2.20
±2.50			
0.1/10			
±2			



ITEM	NAME OF PART	MATERIAL	NOTES
5	Nut	Copper Alloy	M2.5
4	Cover	PA66	UL94V-0
3	Pin 2	Copper Alloy	Sn Plated
2	Pin 1	Copper Alloy	Sn Plated
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B
额定电压/电流/Rated Voltage(V)/Current(A)	300/8
IEC 标准/IEC Standard:	
过压类别/Overvoltage Category/污染等级/Pollution Degree	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	250/7
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	2.5
间距/Pitch(mm)/线数范围/Poles	3.5/N=0~48P
使用温度范围/Operating temperature(°C)	-40~+105
符合RoHS环保要求/Conform to RoHS	Yes

SURFACE:


MATERIAL:	
MAT NO.:	/
STATUS:	/
APPD: Lon CHH	2020.05.25
CHKD: Yu JZh	2020.05.25
DRAFT: WL	2015.10.12
NAME:	15EDGRHM-3.5-XXP-1Y-00A(H)
DRAWING NO.:	15EDGRHM-3.5-C01
TYPE:	CUSTOMER DRAWING
SCALE:	1:1
SHEET:	1/1

DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD

宁波高松电子有限公司

NINGBO DEGSON ELECTRICAL CO., LTD

PCB LAYOUT

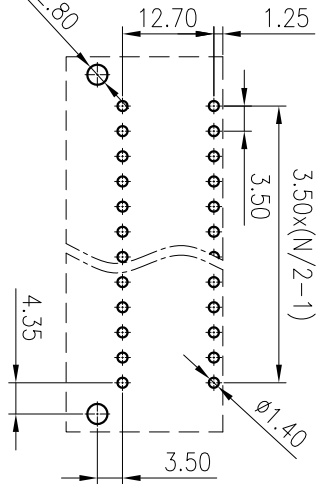

REV	ECN	DESCRIPTION	DRAFT	DATE
1				
2				
3				
4				

REV	ECN	DESCRIPTION	DRAFT	DATE
1				
2				
3				
4				