
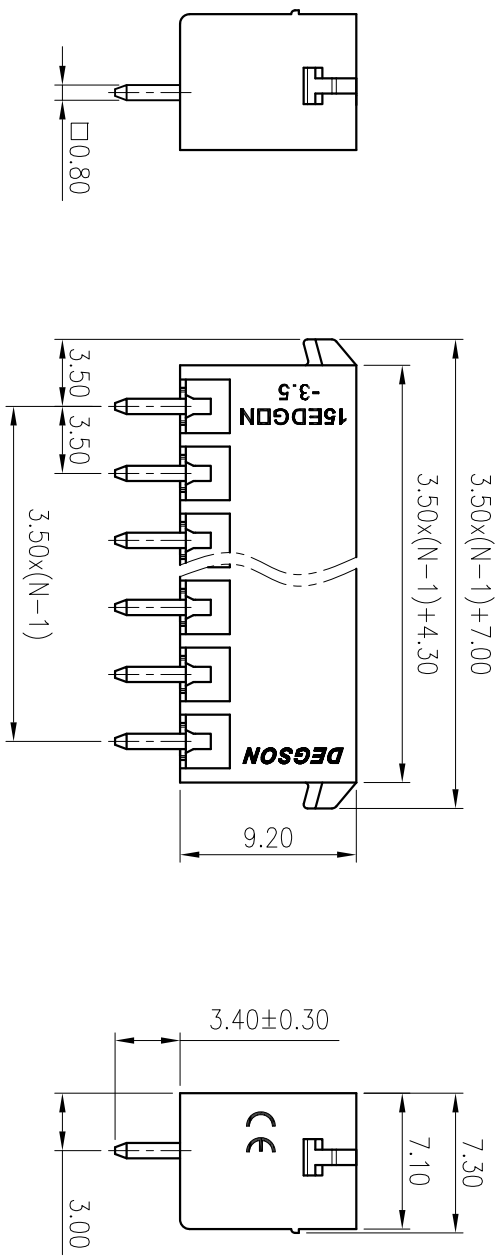
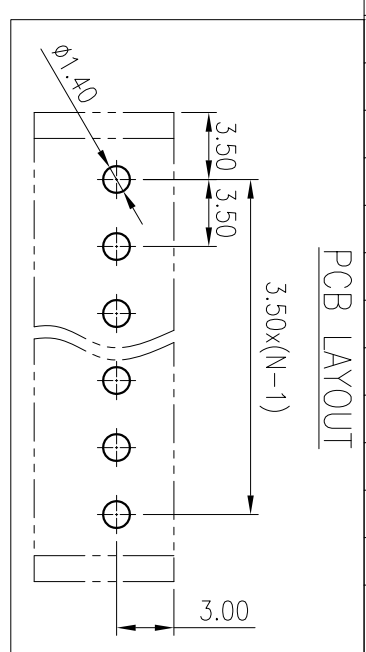


公差 (General Tolerances)		公差 (mm)	
0	>3	>6	>10
~	~	~	~
3	6	10	18
±0.12	±0.18	±0.22	±0.26
±0.31	±0.37	±0.57	±0.80
±1.05	±1.15	±1.60	±2.20
±2.50	±2.50	±2.50	±2.50
0.1/10	0.1/10	0.1/10	0.1/10
±2°	±2°	±2°	±2°

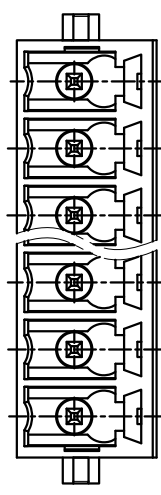

ITEM	NAME OF PART	MATERIAL	NOTES
2	Pin	Copper alloy	Sn Plated
1	Housing	PA66+GF	UL94V-0

UL 标准/UL Standard:		B	
额定电压/Rated Voltage(V)	Current(A)	300	8
EC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	II/2		
额定电压/电流/Rated Voltage(V)/Current(A)	250/7		
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	2.5		
间距/Pitch(mm)/线数范围/Poles	3.50/N=02~22P		
使用温度范围/Operating Temperature(C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL:			
MAT NO.:	/		
STATUS:	/		
APPD:	Lon	ChH	2020.05.23
CHKD:	/		
DRAFT:	BYH	2019.04.02	
NAME:	15EDGVN-3.5-XXP-1Y-00A(H)		
DRAWING NO.:	15EDGVN-3.5-C01	REV	T1
TYPE:	CUSTOMER DRAWING	SCALE:	2.5:1 SHEET 1/1

DRFT	DATE	DESCRIPTION	ECN
Yu JZh	2020.05.23	Change the drawing and tolerance table	
REV			
(T1)			

研发中心  
管发专用  
2020.05.23  
(仅限内部使用,对外无效)

宁波高松电子有限公司  
NINGBO DEGSON ELECTRICAL CO., LTD